


# Taping Specification

## TO 92

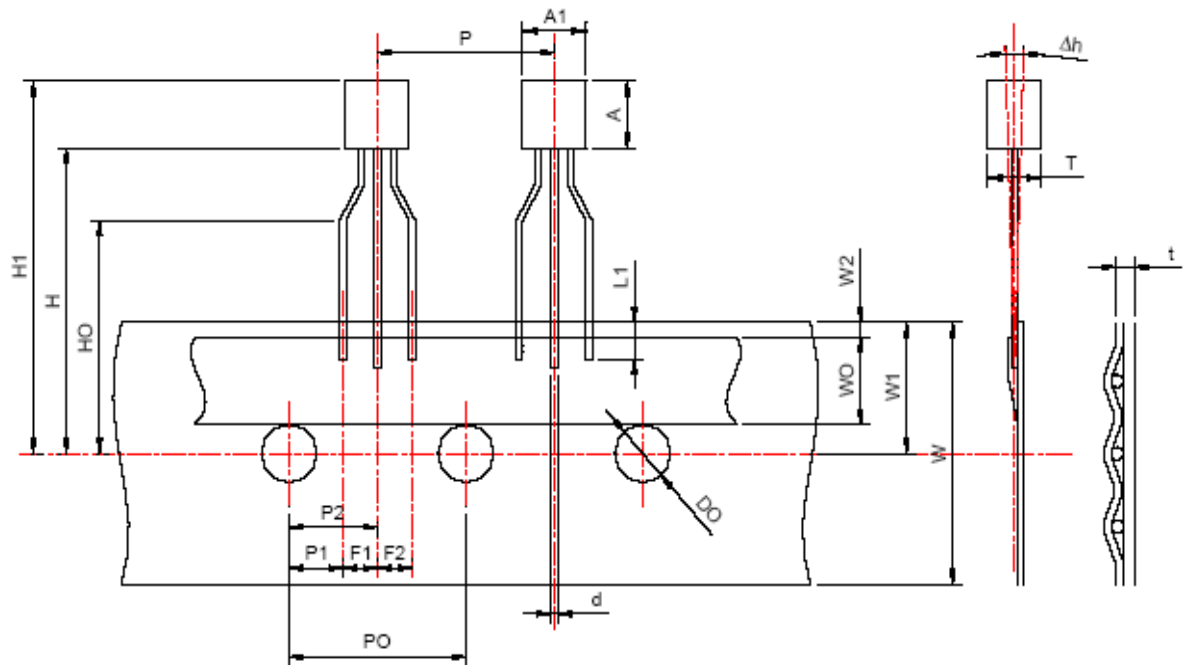

ITEM	Symbol	Dimension	
		TYP	Tolerance
BODY WIDTH	A1	4.58	+0.25,-0.15
BODY HEIGHT	A	4.58	± 0.20
BODY THICKNESS	T	3.86	MAX
LEAD-WIRE DIAMETER	d	0.46	-
PITCH OF COMPONENT	P	12.7	± 0.5
FEED HOLE PITCH	PO	12.7	± 0.2
HOLE CENTER TO COMPONENT CENTER	P2	6.35	± 0.5
LEAD-TO-LEAD DISTANCE	F1,F2	2.5	+0.4,-0.1
COMPONENT ALIGNMENT,F-R	Δ h	0	± 1.0
TAPE WIDTH	W	18.0	+1.0,-0.5
HOLE-DOWN TAPE WIDTH	WO	6.0	± 0.5
HOLE POSITION	W1	9.0	± 0.5
HOLE-DOWN TAPE POSITION	W2	1.0	MAX
HEIGHT OF COMPONENT FROM TAPE CENTER	H	21.0	MAX
LEAD-WIRE CLUNCH HEIGHT	HO	16.0	± 0.5
COMPONENT HEIGHT	H1	27.0	MAX
LEAD-WIRE (TAPE PORTION)	L1	2.5	MIN.
FEED HOLE DIAMETER	DO	4.0	± 0.2
TOTAL TAPE THICKNESS	t	0.65	± 0.2
POSITION OF HOLE	P1	3.85	± 0.5