
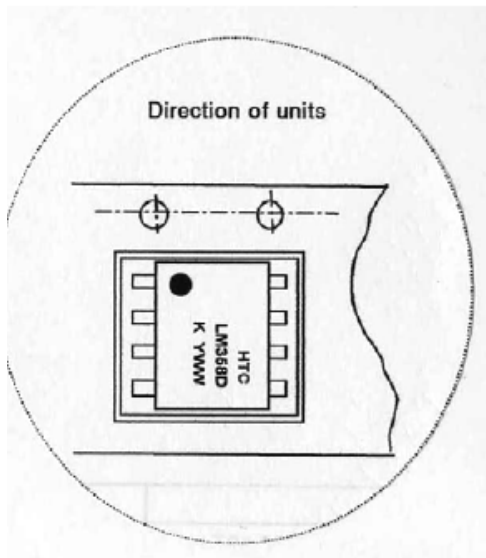


Taping Specification

SOP 8 / SOP8-PP

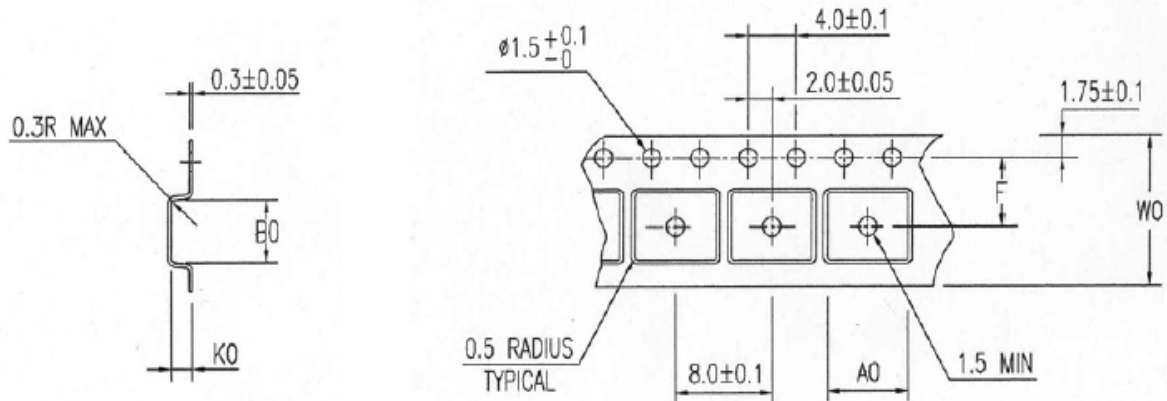

	ADVANTEK					STOCK NO.
	A0	B0	K0	W0	F	
SS-S08	6.7 ± 0.1	5.4 ± 0.1	2.1 ± 0.1	12.0 ± 0.3	5.5 ± 0.05	215-3090-132
SS-S014	6.5 ± 0.1	9.0 ± 0.1	2.1 ± 0.1	16.0 ± 0.3	7.5 ± 0.05	215-3090-133

NOTE

1. SPECIFICATIONS SA-D-023 & SA-A-026 SHALL APPLY.
2. A_0 & B_0 DIMENSIONS ARE MEASURED ON A PLANE 0.3 mm ABOVE THE BOTTOM OF THE POCKET.
3. K_0 MEASURED FROM A PLANE ON THE INSIDE BOTTOM OF THE POCKET TO THE TOP SURFACE OF THE CARRIER.
4. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2
5. MATERIAL : STATIC DISSIPATIVE POLYSTYRENE. SURFACE RESISTIVITY SHALL BE $10^6 \sim 10^{11}$ OHMS/SQ.
6. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE.

- Quantity / Package

1. Loaded Quantity Per Reel : 2,500 pcs
2. Reel Packing Per Inner Box : 2 reels
3. Inner Box Packing Per Out Box : 8box